
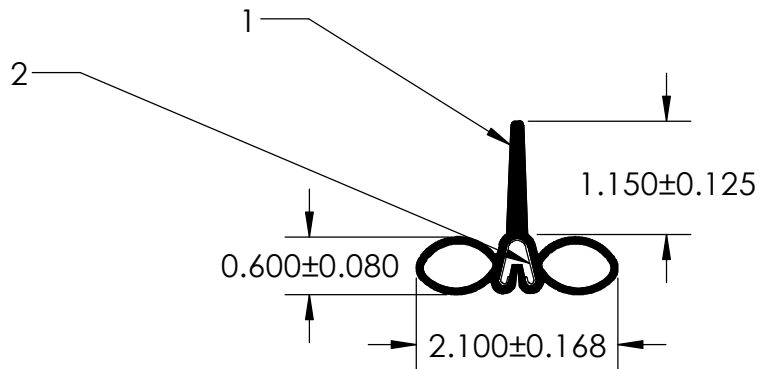


NOTES:

- 1) CLOSED CELL SPONGE RUBBER (DENSITY 0.638 G/CM<sup>3</sup>)
- 2) SD-487 SPRING STEEL (0.030 LB/FT)

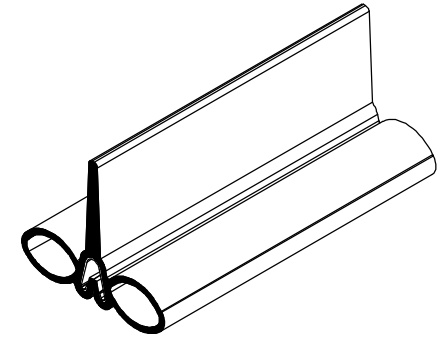

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	TITLE:		
	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	ED-50465		
	WEIGHT 0.202 LB/FT	SIZE	DWG. NO.	REV
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D1056 2A3	A	UG-1-SO-487-ST-003	A
	ASTM D2000 N/A	DR. BY	DATE	SHEET
	SCALE: 1:2	L. CLARK	1/4/2017	1 OF 1