

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.725 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



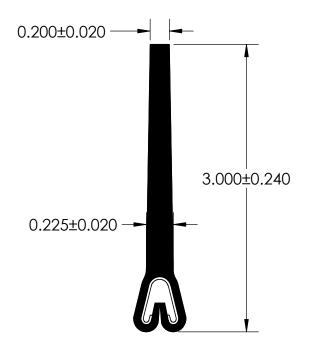

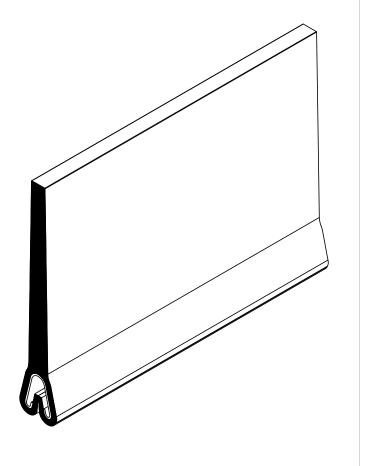

UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		ED-5250		
	WEIGHT 0.226 LB/FT				
	ASTM D1056 2A2	SIZE DWG. NO.	THE T	REV •	
	ASTM D2000 N/A		UG-1-FL-487-ST-039	A	
P:\Engineering\Prints\Flap Seals\ED-5250 UG-1-FL-487-ST-039	SCALE: 1:1	DR. BY C	. VENT DATE 1/8/2018	SHEET 1 OF 1	

5

4

3

2