

## NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER  $(0.725 \text{ G/CM}^3)$
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



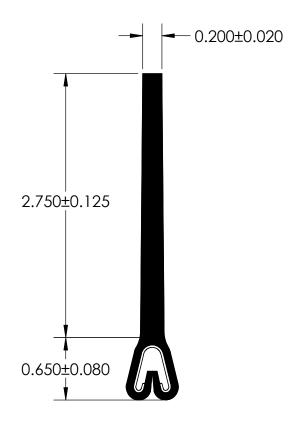

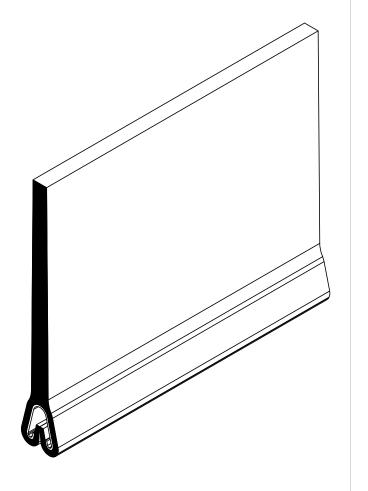

## UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND	PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY		UNLESS OTHERWISE SPECIFIED:					
THIS DRAWING IS T			DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		ED-5350			
WHOLE WITHOUT T	REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	0.295 LB/FT						
PROHIBITED.		ASTM D1056	2A3	SIZE	DWG. NO.	. 1 51 407 67 607		REV <b>▲</b>
DOCUMENT CONTI UG-1-EN-00		ASTM D2000	N/A	A	UG-1-FL-487-ST-036			A
P:\Engineering\Prints\Flap Seals\ED-5350 UG-1-FL-487-ST-036		SCALE:	1:1	DR. BY C.	VENT	DATE 11/3/2017	SHEET	1 OF 1

3

2