

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.650 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



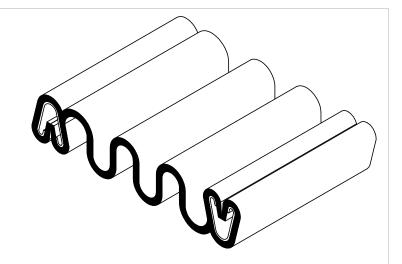

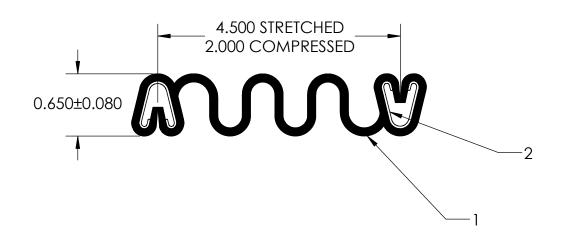

UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

PR	COPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 ED-5382				
		0.248 LB/FT				
		ASTM D1056 2A3	SIZE	DWG. NO.		REV
	OCUMENT CONTROL NUMBER G-1-EN-001-FR-(111416)	ASTM D2000 N/A	A	UG-I-AC	C-487-ST-007	A
P:\Engineering\Prints\Accordion Seals\ED-5382 UG	G-1-AC-487-ST-007	SCALE: 1:1	DR. BY L.	CLARK DATE	10/31/2017 SHI	EET 1 OF 1

5

4

- 3

2