
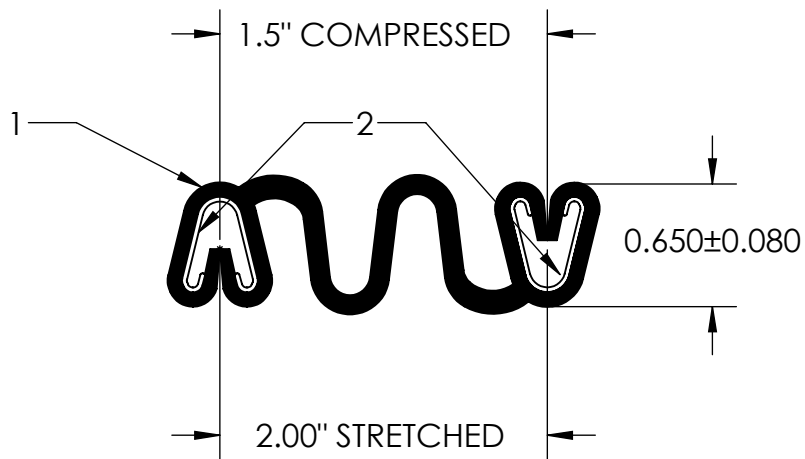


NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.700 G/CM³)

2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)

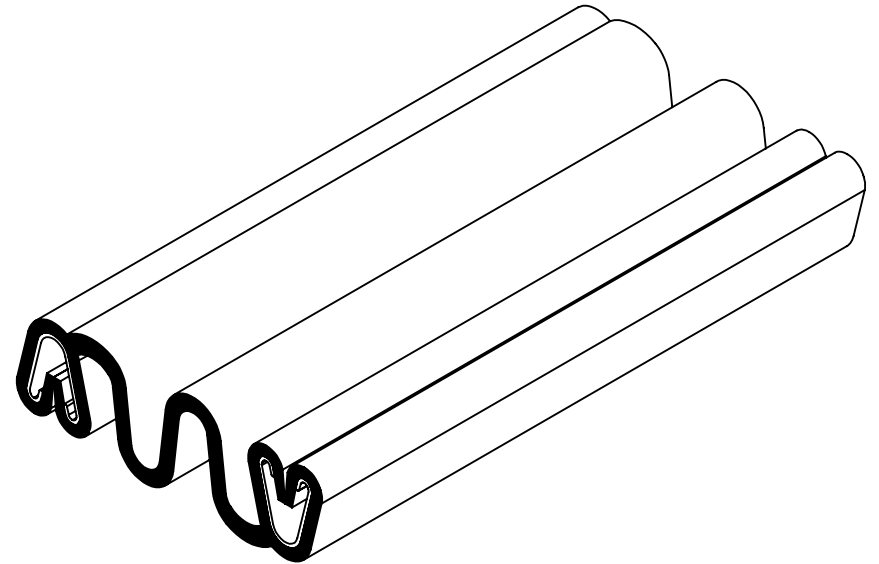

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 2	ED-5384			
A									
B					WEIGHT	0.271 LB/FT			
C					ASTM D1056	2A4			
D					DOCUMENT CONTROL NUMBER	ASTM D2000	N/A		
E				UG-1-EN-001-FR-(080918)	SCALE: 1:1				
P:\Engineering\Prints\Master Prints\ED-5384 UG-1-AC-013				DR. BY C. VENT		DATE	8/21/2020	SHEET 1 OF 1	