
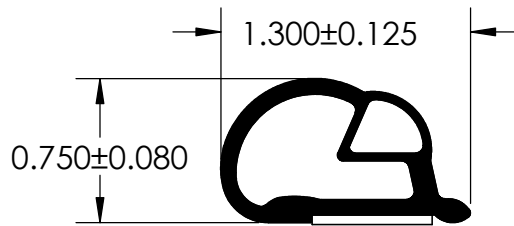


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM<sup>3</sup>)
- 2) 5/8" 3M ST-1200 HEAT ACTIVATED (0.012 LB/FT)

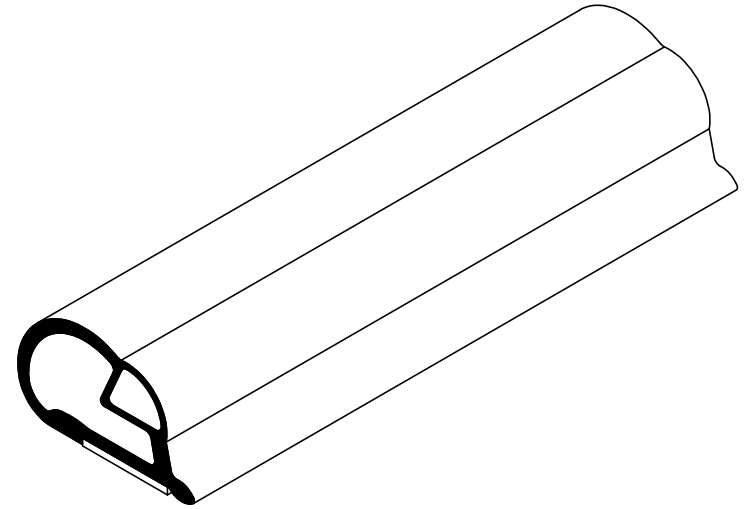

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	TITLE:		
	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	PTL-817-T		
	WEIGHT 0.096 LB/FT			
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D1056 2A4	SIZE <b>A</b>	DWG. NO. UG-1-TS-625-TP-082	REV <b>A</b>
	ASTM D2000 N/A	DR. BY C. VENT	DATE 5/21/2018	SHEET 1 OF 1

P:\Engineering\Prints\Tape Seals\PTL-817-T UG-1-TS-625-TP-082

SCALE: 1:1