

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.725 G./CM 3)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT) 3) DRAIN HOLE



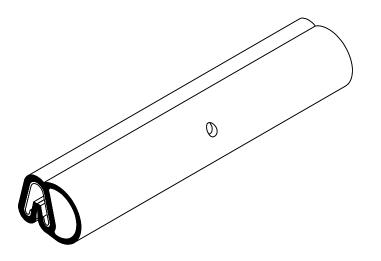



| | PROPRIETARY AND CONFIDENTIAL: | UNLESS OTHERWISE SPECIFIED: | TITLE: | | | |
|--|---|---|----------|----------|--------------|--------------|
| THIS DRAWI | THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | SD-119 | | | |
| | REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS | 0.101 LB/FT | | | | |
| | PROHIBITED. | ASTM D1056 2A2 | SIZE | DWG. NO. | | REV |
| | DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416) | ASTM D2000 N/A | A | UG-1-B | L-487-ST-049 | Α |
| P:\Engineering\Prints\Bulb Seals\SD-119 UG-1-BL-487-ST-049 | | SCALE: 1:1 | DR. BY C | . VENT | 1/19/2018 | SHEET 1 OF 1 |

5

3