

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.300 G/CM³)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)



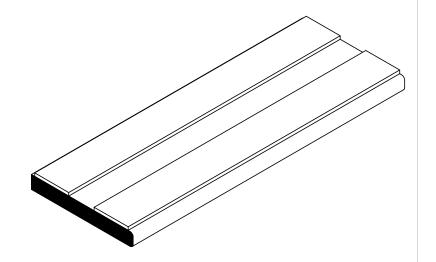

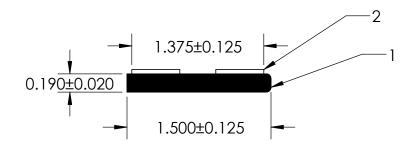

	PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP.INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE:	TITLE: SD-1500-DT			
		0.037 LB/FT ASTM D1056 2A2	SIZE	IZE DWG. NO.		REV	REV
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 N/A	A	UG-	UG-1-TS-500-TP-039	A	
P:\Engineering\Prints\Tape Seals\SD-1500-DT UG-1-TS-500-TP-039		SCALE: 1:1	DR. BY L.	CLARK	DATE 8/22/2017	SHEET 1 OF	1