
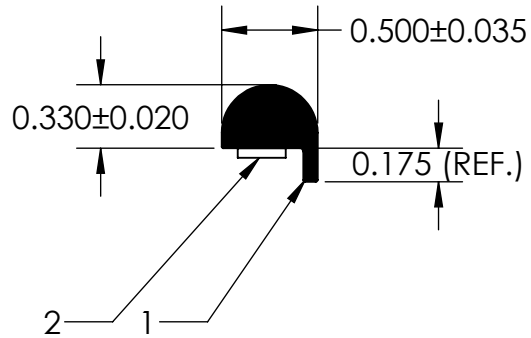


NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.560 G/CM³)

2) 1/4" ST-1200 3M HEAT ACTIVATED TAPE (0.004 LB/FT)

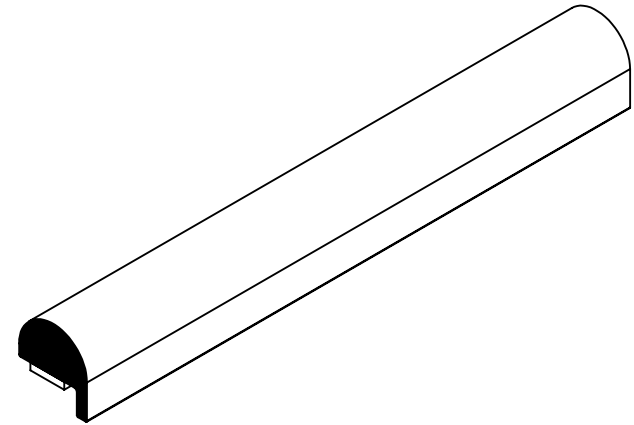

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-151-T				
A										
B					WEIGHT	0.036 LB/FT				
C					ASTM D1056	2A3				
D					DOCUMENT CONTROL NUMBER	ASTM D2000	N/A			
E				UG-1-EN-001-FR-(080918)		SIZE	DWG. NO.	REV		
P:\Engineering\Prints\Master Prints\Tape Seals\SD-151-T UG-1-TS-250-TP-172				SCALE:	1:1	A	UG-1-TS-250-TP-172			
						DR. BY	C. VENT	DATE	10/14/2020	SHEET 1 OF 1