
NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.827G/CM 3)





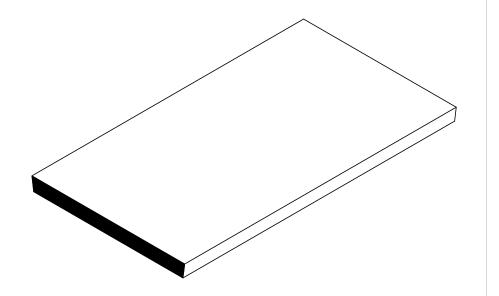

			250 may and 254				
	PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		SD-1522			
		WEIGHT 0.151 LB/FT					
		ASTM D1056 2A3	SIZE	DWG. NO.	UG-1-RE-013		REV
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 N/A					А
P:\Engineering\Prints\Rubber Extursion\ SD-1522 UG-1-RE-013		SCALE: 1:1	DR. BY C	. VENT	DATE 1/2/2018	SHEET	1 OF 1

3