
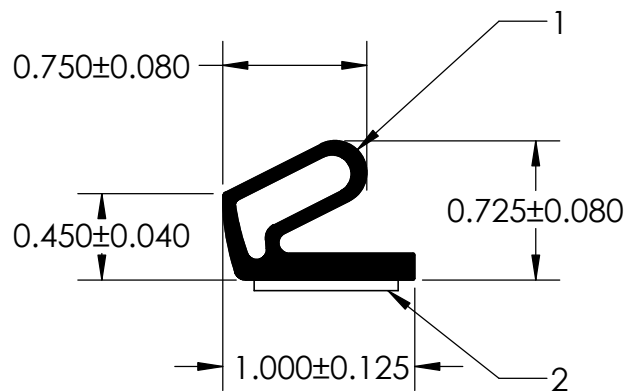


NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM<sup>3</sup>)

2) 3/4" ST-1200 3M HEAT ACTIVATED TAPE (0.013 LB/FT)

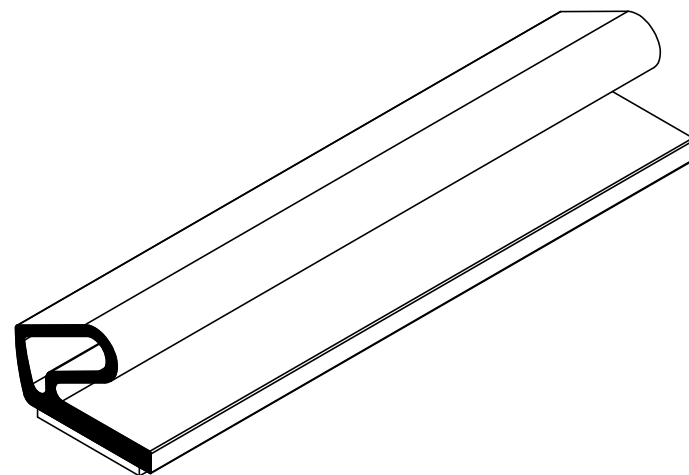

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-340-T		
A								
B					WEIGHT	0.098 LB/FT		
C					ASTM D1056	2A4		
D					DOCUMENT CONTROL NUMBER	ASTM D2000	N/A	
E				UG-1-EN-001-FR-(103018)	SCALE: 1:1			
P:\Engineering\Prints\Tape Seals\SD-340-T UG-1-TS-750-TP-132				DR. BY C. VENT		DATE	1/20/2020	SHEET 1 OF 1