

NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)

2) SD-500 L SPRING STEEL CARRIER (0.035 LB/FT)

3) .125" VENT HOLES

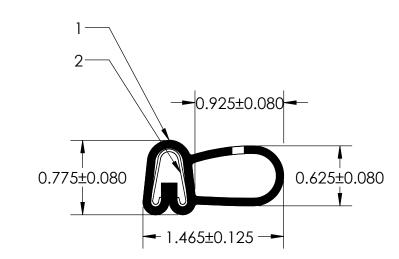

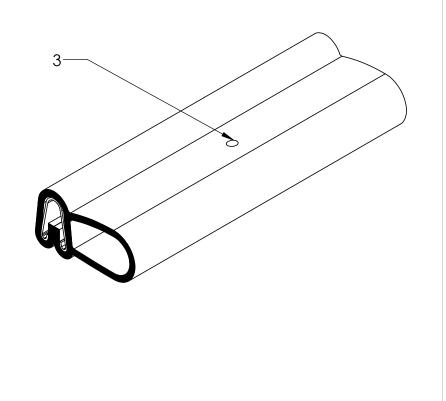



UNI-GRIP, INC. 9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:	ITLE:		
rev. A	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		SD-504 W/500L		
B					WEIGHT 0.159 LB/FT				
C					ASTM D1056 2A4	SIZE	DWG. NO	Э.	REV
D				DOCUMENT CONTROL NUMBER	ASTM D2000	Α		UG-1-BL-500-ST-064	A
⊑ P:∖Er	ngineering`	\Prints\Bulb	Seals\SD-504 W/500L	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	SCALE: 1:1	DR. BY C	. VENT	DATE 6/10/2019	Sheet 1 of 1
		5	Å	4	3		2]