

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



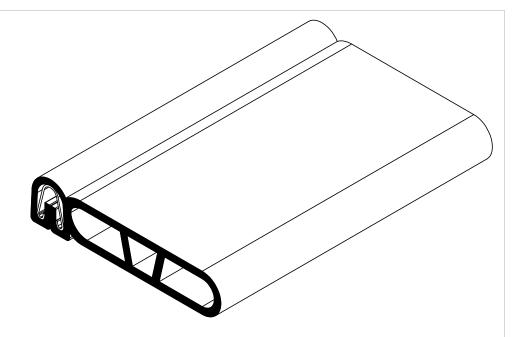

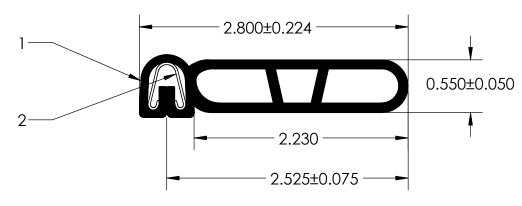

UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:		TITLE:				
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3			SD-507			
В				REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN	0.310 LB/FT						
С				PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	ASTM D1056	2A4	SIZE	DWG. 1		REV	
D E				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(103018)	ASTM D2000 N/A		Α	UG-1-BL-487-ST-083			Α
P:\Engineering\Prints\Bulb Seals\SD-507 UG-1-BL-487-ST-083					SCALE:	1:1	DR. BY C	. VENT	DATE 4/1/2020	SHEET	1 OF 1