

NOTES:

- 1) CLOSED CELL SPONGE RUBBER (0.370 G/CM³)
 2) 3/8" 3M HEAT ACTIVATED TAPE (0.006 LB/FT)



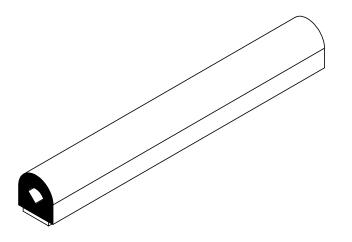



F	PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE:	SIZE DWG. NO.	
		0.038 LB/FT ASTM D1056 2A2	SIZE		
	DOCUMENT CONTROL NUMBER JG-1-EN-001-FR-(111416)	ASTM D2000 N/A	Α	UG-1-TS-375-TP-076	A
P:\Engineering\Prints\Tape Seals\ SD-807-T UG-1-TS-375-TP-076		SCALE: 1:1	DR. BY	. VENT DATE 2/21/2018	SHEET 1 OF 1