
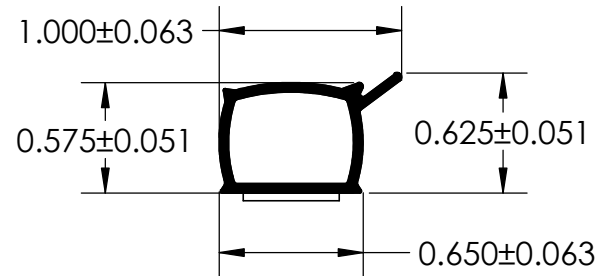


NOTES:

- 1) 45 DUROMETER EPDM DENSE RUBBER (1.200 G/CM³)
- 2) 1/2" ST-1200 3M HEAT ACTIVATED TAPE (0.010 LB/FT)

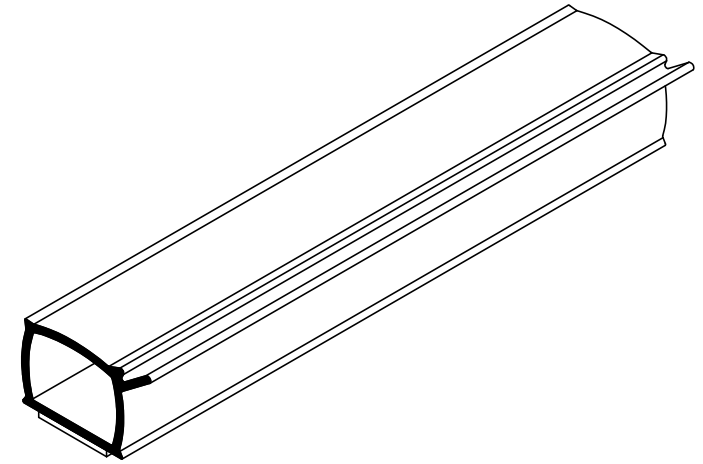

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	APPROVED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TS-088				
A					WEIGHT 0.091 LB/FT					
B					ASTM D1056 N/A	SIZE A	DWG. NO. UG-1-TS-500-TP-088	REV A		
C					DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 3BA711 A14 B13 C12 F17				
D										
E										
P:\Engineering\Prints\Rubber Extrusion\TS-088 UG-1-TS-500-TP-088				SCALE:	1:1	DR. BY	C. VENT	DATE	8/24/2018	SHEET 1 OF 1